OSD AUDIO®

Unpacking the Speakers

Carefully unpack the speakers and retain the carton and packing materials for future use.

Wiring the Speakers

Note: Please turn off and unplug your system prior to making any connections. To wire your system, please use good quality grade speaker cable with polarity coding (Usually identified with a marking on the cable) as per the gauge recommendations indicated below. The side of the cable that has the coding (a ridge, or "+" marking) usually denotes the positive polarity.

Connect the positive lead of the speaker wire (indicated with a "+") to the Red (or positive) speaker terminal. Connect the other speaker wire lead to the Black (or negative) speaker terminal.

Connect the opposite end of the speaker wire to your amplifier making sure that the polarity corresponds.("+" to "+" or Red to Red, and "-" to "-" or Black to Black). see diagram below:

Up to	50'	120'
Gauge	16	14

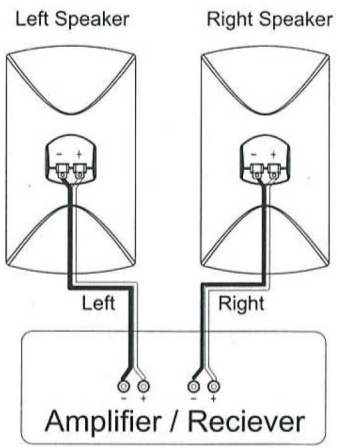

Speaker Connections

USER MANUAL
AP490W
AP490B

Listening Test

Once you have connected your speakers, turn on your system and begin playback of material you are familiar with. Begin at low volume and increase to a comfortable listening level. The system should sound balanced with stereo sound. if the sound is distorted and confused, check to make sure that the speakers have been correctly wired to your amplifier/receiver.

Attaching to a wall

Note: Failure to properly install the speaker could result in injury from falling objects.

Maintenance

Simply use a damp cloth to clean, avoid use of chemical products and polishes .

Speaker Type:	4″ High Fidelity Patio Speakers
Tweeter:	1″ Supernil Silk Soft Dome Tweeter
Woofer:	4″ Waterproof Cone
Impedance:	8Ω
Sensitivity:	88dB
70V Tap:(optional)	16W, 8W, 4W, 2W.
Frequency Response:	60Hz - 22kHz
Power Handling:	100 Watts
Dimensions:(H × W × D)	9 ½″ x 5 5⁄16″ x 5 1⁄8″
Unit of Measure:	Pair
Finish:	White or Black
Warranty:	1 Year

OSD Audio • 775 Columbia St • Brea • CA • 92821
• Tel (562) 697-2600 • Fax (562) 697-2668 • www.osdaudio.com •